

PRO-LED NON-MAINTAINED LED SPOT



DESCRIPTION


3 watt white recessed downlight.
Available with IP44 cover to order.

Non-maintained LED.

SPECIFICATIONS

PRO-LED (add options from icons).

SPECS AND OPTIONS

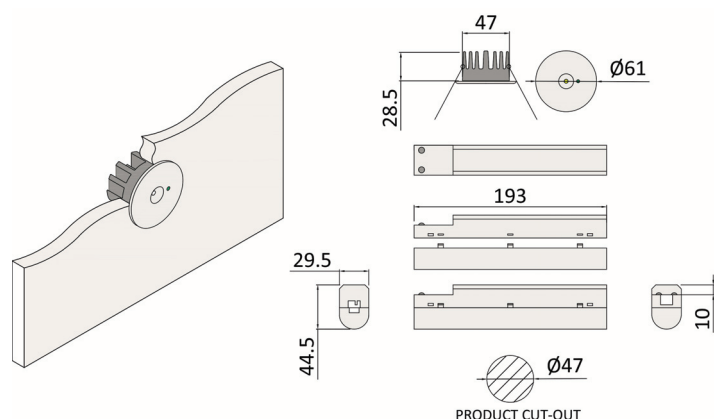

			230V 50Hz	Temp. range 5°-50°C
	EN 60598-2.22 COMPLIANT	GLOW-WIRE 850°C	IP20	IP44
MODE NM	CREE LED INSIDE	LED INSIDE	LAMP LIFE 50,000 HRS	
	WARRANTY 5 YR	WARRANTY 3 YR BATTERY	BATTERY NiMH	INPUT VA 5.0
3.6V 2.2Ah Type "AA" NiMH	CRI > 0.7	EM LUMENS 209	CCT 4000	CUT-OUT 47Ø

PRO-LED NON-MAINTAINED SELF-CONTAINED LED SPACING TABLE

Distance table for even mounting on escape routes (1lx on the centre line)

Mounting height (m)					
2.00	3.00	7.50	7.50	7.50	3.20
2.50	3.30	8.50	8.50	8.60	3.40
3.00	3.40	9.30	9.20	9.30	3.50
3.50	3.60	9.70	9.60	9.70	3.70
4.00	3.70	10.10	9.90	10.10	3.80

Distance table for even mounting in open spaces (0.5lx)

Mounting height (m)					
2.50	3.10	7.10	7.10	7.10	3.10
2.80	3.60	8.30	8.30	8.30	3.60
3.00	3.50	8.30	8.30	8.30	3.60
3.50	4.10	10.10	10.10	10.10	4.10
4.00	4.00	10.20	10.20	10.20	4.10
5.00	3.90	10.20	10.20	10.20	3.90
6.00	3.90	10.20	10.66	11.11	3.90

Distance from a call point to achieve 5 lux vertically on the face (any orientation)

	Not less than (m)	Not greater than (m)
2.80	0.30	2.08
3.00	0.50	2.00
3.50	-	-
4.00	-	-
5.00	-	-