

TL-LED




DESCRIPTION

IP65 robust slim line enclosure with 2 x 2.2w LED multi directional beams. Non-maintained LED.

SPECIFICATIONS

TL-LED (add options from icons).

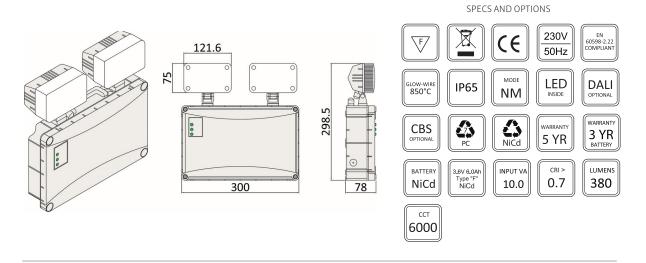

TL-LED IP65 NON-MAINTAINED SELF-CONTAINED LED SPACING TABLE

Distance table for even mounting on escape routes (1lx on the centre line)

Mounting height (m)					
2.00	2.30	5.40	5.60	5.60	2.40
2.50	2.90	6.70	7.00	7.10	3.00
3.00	3.30	7.75	8.10	8.10	3.30
3.50	3.60	8.30	8.80	8.80	3.60
4.00	3.80	8.90	9.40	9.50	3.80

Distance table for even mounting in open spaces (0.5lx)

Mounting height (m)					
2.50	2.30	5.50	5.50	5.50	2.30
2.80	2.50	6.20	6.20	6.20	2.60
3.00	2.50	6.20	6.20	6.20	2.50
3.50	2.90	7.20	7.15	7.10	2.90
4.00	2.90	7.20	7.15	7.10	2.90
5.00	3.30	8.40	8.40	8.40	3.30
6.00	3.30	8.40	8.40	8.40	3.30